


## Double Row Angular Contact Ball Bearings

3000A Series-3004A



WUXI GUANGQIANG BEARING TRADE CO.,LTD

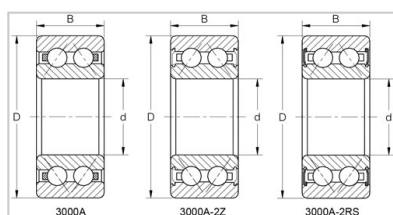

|                                   |              |
|-----------------------------------|--------------|
| Обозначение                       | <b>3004A</b> |
| Основные размеры (мм)             |              |
| d                                 | 20           |
| D                                 | 42           |
| B                                 | 16           |
| Номинальная грузоподъемность (кН) |              |
| Динамический (Cr)                 | 14.2         |
| Статический (Cor)                 | 9.6          |
| Ограниченная скорость (об / мин)  |              |
| Смазка                            | 11000        |
| Масло                             | 13000        |
| Масса (кг)                        | 0.08         |

## GQZ high quality 3000A Series Double Row Angular Contact Ball Bearings

Angular contact ball bearings have inner and outer ring raceways that are displaced relative to each other in the direction of the bearing axis. This means that these bearings are designed to accommodate combined loads, i.e. simultaneously acting radial and axial loads.

The axial load carrying capacity of angular contact ball bearings increases as the contact angle increases. The contact angle is defined as the angle between the line joining the points of contact of the ball and the raceways in the radial plane, along which the combined load is transmitted from one raceway to another, and a line perpendicular to the bearing axis

The most commonly used designs are:

single row angular contact ball bearings

double row angular contact ball bearings

four-point contact ball bearings

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com