


Single Row Tapered Roller Bearing

32300 Series-32311BJ2/QCL7C

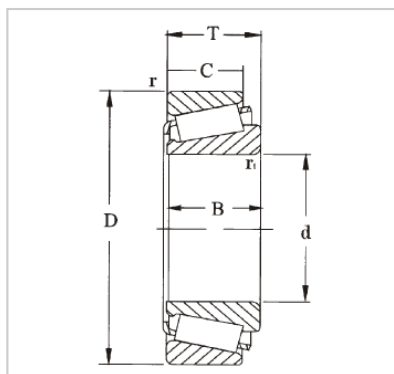

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Обозначение	32311BJ2/QCL7C
Основные размеры (мм)	
d1	55
D	120
B	45.5
Номинальная грузоподъемность (кН)	
dyc (Cr)	216
stc (Cop)	260
Пу	30
Номинальная скорость (об / мин)	
Рейтинги скорости	4300
Ограничение скорости	5600
Вес (кг)	2.50
ISO335	
Размеры (ABMA)	5FD
Размеры (мм)	
d	55
d1 □	90.5
B	43
C	35
r1,2 (мин)	2.5
r3,4 (мин)	2
a	36
Размеры абатмента и галтели (мм)	
да (макс)	67
дБ (мин)	65
Да (мин)	91
Да (макс.)	112
Дб (мин)	112
Са (мин)	5
Сb (мин)	10.5
ра (макс)	2
rb (макс.)	2
Ценить	
e	0.54
Y	1.1
Эй	0.6

GQZ high quality 32300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered

roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com