


Single Row Tapered Roller Bearing

33200 Series-33213TN9/Q

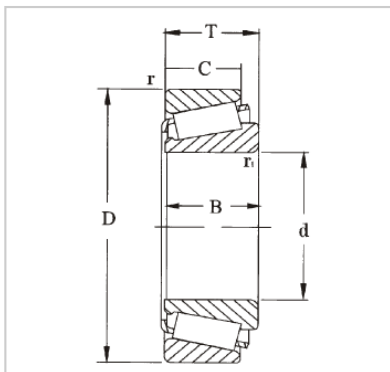

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Обозначение	33213TN9/Q
Основные размеры (мм)	
d1	65
D	120
B	41
Номинальная грузоподъемность (кН)	
dyc (Cr)	194
stc (Kop)	270
Пу	30.5
Номинальная скорость (об / мин)	
Рейтинги скорости	3800
Ограничение скорости	5300
Вес (кг)	2.05
ISO335	
Размеры (ABMA)	3EE
Размеры (мм)	
d	65
d1 □	92.1
B	41
C	32
r1,2 (мин)	2
r3,4 (мин)	1.5
a	29
Размеры абатмента и галтели (мм)	
да (макс)	75
дБ (мин)	74
Да (мин)	102
Да (макс.)	113
Дб (мин)	115
Са (мин)	6
Сb (мин)	9
ра (макс)	2
rb (макс.)	1.5
Ценить	
e	0.4
Y	1.5
Эй	0.8

GQZ high quality 33200 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered

roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com