


Single Row Tapered Roller Bearing

31300 Series-31320XJ2/CL7CVQ051

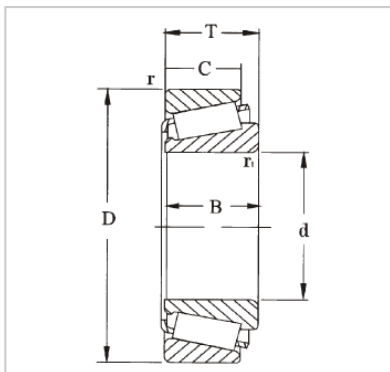

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Обозначение	31320XJ2/CL7CVQ051
Основные размеры (мм)	
d1	100
D	215
B	56.5
Номинальная грузоподъемность (кН)	
dyc (Cr)	430
stc (Cор)	465
Пу	51
Номинальная скорость (об / мин)	
Рейтинги скорости	2400
Ограничение скорости	3000
Вес (кг)	8.60
ISO335	
Размеры (ABMA)	7GB
Размеры (мм)	
d	100
d1 □	158
B	51
C	35
r1,2 (мин)	4
r3,4 (мин)	3
a	65
Размеры абатмента и галтели (мм)	
да (макс)	121
дБ (мин)	115
Да (мин)	168
Да (макс.)	201
Дб (мин)	202
Са (мин)	7
Сb (мин)	21.5
ра (макс)	3
rb (макс.)	2.5
Ценить	
e	0.83
Y	0.72
Эй	0.4

GQZ high quality 31300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered

roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com