


Spherical Roller Bearing

23100 Series



WUXI GUANGQIANG BEARING TRADE CO.,LTD

BEARING

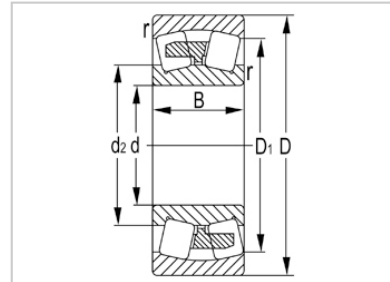

Designation	Principal Dimensions(mm)				Basic Load Ratings(KN)		Limited Speed(rpm)		Weight (kg)
	d	D	B	rs min	Dynamic(Cr)	Static(Cor)	Grease	Oil	
23148	240	400	128	4	1730	3050	650	1000	65.8
23132	160	270	86	2.1	840	1370	1000	1600	19.8
23144W3 3C3	220	370	120	4	1540	2670	720	1100	53.3
23144KW 3C3	220	370	120	4	1540	2670	720	1100	51.6
23144K	220	370	120	4	1540	2670	720	1100	51.6
23144	220	370	120	4	1540	2670	720	1100	53.3
23140W3 3C3	200	340	112	3	1350	2270	800	1200	43.3
23140KW 3C3	200	340	112	3	1350	2270	800	1200	42
23140K	200	340	112	3	1350	2270	800	1200	42
23138W3 3C3	190	320	104	3	1190	2020	850	1300	35.3
23140	200	340	112	3	1350	2270	800	1200	43.3
23138KW 3C3	190	320	104	3	1190	2020	850	1300	34.2
23138K	190	320	104	3	1190	2020	850	1300	34.2
23138	190	320	104	3	1190	2020	850	1300	35.3
23136W3 3C3	180	300	96	3	1030	1730	900	1400	25.1
23136KW 3C3	180	300	96	3	1030	1730	900	1400	24.2
23136K	180	300	96	3	1030	1730	900	1400	24.2
23136	180	300	96	3	1030	1730	900	1400	25.1
23134W3 3C3	170	280	88	2.1	885	1490	960	1500	21.5
23134KW 3C3	170	280	88	2.1	885	1490	960	1500	20.8

Designation	Principal Dimensions(mm)				Basic Load Ratings(KN)		Limited Speed(rpm)		Weight (kg)
	d	D	B	rs min	Dynamic(Cr)	Static(Cor)	Grease	Oil	
23134	170	280	88	2.1	885	1490	960	1500	21.5
23134K	170	280	88	2.1	885	1490	960	1500	20.8
23132W3 3C3	160	270	86	2.1	840	1370	1000	1600	19.8
23132KW 3C3	160	270	86	2.1	840	1370	1000	1600	19.2
23132K	160	270	86	2.1	840	1370	1000	1600	19.2
23130W3 3C3	150	250	80	2.1	730	1190	1100	1700	15.6
23130KW 3C3	150	250	80	2.1	730	1190	1100	1700	15.1
23130K	150	250	80	2.1	730	1190	1100	1700	15.1
23130	150	250	80	2.1	730	1190	1100	1700	15.6
23128W3 3C3	140	225	68	2.1	540	895	1200	1800	10.2
23128KW 3C3	140	225	68	2.1	540	895	1200	1800	9.86
23128K	140	225	68	2.1	540	895	1200	1800	9.86
23128	140	225	68	2.1	540	895	1200	1800	10.2
23126W3 3C3	130	210	64	2	495	795	1300	2000	8.47
23126KW 3C3	130	210	64	2	495	795	1300	2000	8.2
23126K	130	210	64	2	495	795	1300	2000	8.2
23126	130	210	64	2	495	795	1300	2000	8.47
23124W3 3C3	120	200	62	2	455	705	1400	2100	7.7
23124KW 3C3	120	200	62	2	455	705	1400	2100	7.46
23124K	120	200	62	2	455	705	1400	2100	7.46

Designation	Principal Dimensions(mm)				Basic Load Ratings(KN)		Limited Speed(rpm)		Weight (kg)
	d	D	B	rs min	Dynamic(Cr)	Static(Cor)	Grease	Oil	
23124	120	200	62	2	455	705	1400	2100	7.7
23122W33C3	110	180	56	2	370	580	1500	2400	5.4
23122KW33C3	110	180	56	2	370	580	1500	2400	5.22
23122K	110	180	56	2	370	580	1500	2400	5.22
23122	110	180	56	2	370	580	1500	2400	5.4
23120W33C3	100	165	52	2	310	470	1700	2600	4.3
23120KW33C3	100	165	52	2	310	470	1700	2600	4.16
23120	100	165	52	2	310	470	1700	2600	4.3
23120K	100	165	52	2	310	470	1700	2600	4.16
23148K	240	400	128	4	1730	3050	650	1000	63.8
23148KW33C3	240	400	128	4	1730	3050	650	1000	63.8
23148W33C3	240	400	128	4	1730	3050	650	1000	65.8
23152	260	440	144	4	2140	3850	600	920	91.4
23152K	260	440	144	4	2140	3850	600	920	88.6
23152KW33C3	260	440	144	4	2140	3850	600	920	88.6
23152W33C3	260	440	144	4	2140	3850	600	920	91.4
23156	280	460	146	5	2300	4250	550	850	97.7
23156K	280	460	146	5	2300	4250	550	850	94.6
23156KW33C3	280	460	146	5	2300	4250	550	850	94.6
23156W33C3	280	460	146	5	2300	4250	550	850	97.7

Designation	Principal Dimensions(mm)				Basic Load Ratings(KN)		Limited Speed(rpm)		Weight (kg)
	d	D	B	rs min	Dynamic(Cr)	Static(Cor)	Grease	Oil	
23160	300	500	160	5	2750	5000	510	780	131
23160K	300	500	160	5	2750	5000	510	780	127
23160KW33C3	300	500	160	5	2750	5000	510	780	127
23160W33C3	300	500	160	5	2750	5000	510	780	131