


Single Row Tapered Roller Bearing

30300 Series



WUXI GUANGQIANG BEARING TRADE CO.,LTD

BEARING

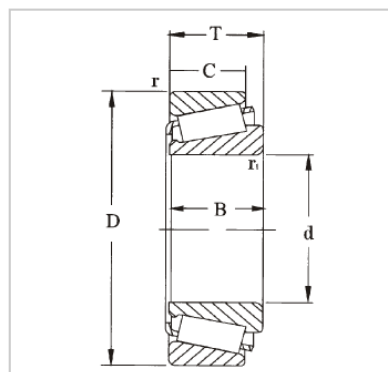

Designation	Principal dimensions [mm]			Basic load ratings [kN]		Pu	Speed ratings [rpm]		Weight (kg)	ISO 35	Dimensions [mm]								Abutment and fillet dimensions [mm]								Value		
	d1	D	B	dy	stc		Sp	Li			d	d1	B	C	r1	r3	a	da	db	Da	Da	Db	Ca	Cb	ra	rb	e	Y	Yo
30303J2	17	47	15	28	25	2.75	1200	1600	0.13	2FB	17	30.4	14	12	1	1	10	25	23	40	41	42	2	3	1	1	0.28	2.1	1.1
32303J2/Q	17	47	20	40	33	3.65	1200	1600	0.17	2FD	17	30.7	19	16	1	1	12	24	23	39	41	43	3	4	1	1	0.28	2.1	1.1
30304J2/Q	20	52	16	39	32	3.6	1200	1400	0.17	2FB	20	34.3	15	13	1.5	1.5	11	28	27	44	45	47	2	3	1.5	1.5	0.3	2	1.1
30305	25	62	18	44	43	4.75	900	1200	0.26	2FB	25	41.5	17	15	1.5	1.5	13	34	32	54	55	57	2	3	1.5	1.5	0.3	2	1.1

[illegible]

Designation	Principal dimensions [mm]			Basic load ratings [kN]		Pu	Speed ratings [rpm]		Weight (kg)	ISO 35	Dimensions [mm]							Abutment and fillet dimensions [mm]								Value			
	d1	D	B	dy (C)	stc (Cor)		Sp ee d	Li mit Ring Speed			Dimensions (ABMA)	d	d1 [	B	C	r1, 2 (min)	r3, 4 (min)	a	da (max)	db (min)	Da (min)	Da (max)	Db (min)	Ca (min)	Cb (min)	ra (max)	rb (max)	e	Y
30324J2	120	260	59	561	710	73.5	2000	2600	14.0	2GB	120	178	55	46	4	3	47	153	135	221	245	237	7	13.5	3	2.5	0.35	1.7	0.9
30326J2	130	280	63.75	627	800	83	1800	2400	17.0	2GB	130	196	58	49	5	4	51	164	150	239	263	255	8	14.5	4	3	0.35	1.7	0.9
33030	150	225	59	457	865	86.5	2000	2600	8.15	2EE	150	188	59	46	3	2.5	48	164	162	200	213	217	8	13	2.5	2	0.37	1.6	0.9
30332J2	160	340	75	913	1180	114	1500	2000	29.0	2GB	160	233	68	58	5	4	61	201	180	290	323	310	9	17	4	3	0.35	1.7	0.9
30352J2	260	540	113	2120	3050	250	8500	12000	110	-	260	376	102	85	6	6	97	325	286	461	514	493	15	28	5	5	0.35	1.7	0.9