


Single Row Tapered Roller Bearing

32000 Series-32010X/QCL7CVB026

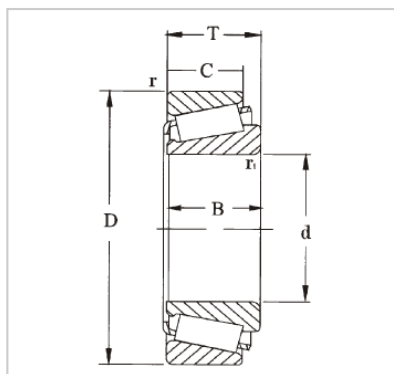

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Обозначение	32010X/QCL7CVB026
Основные размеры (мм)	
d1	50
D	80
B	20
Номинальная грузоподъемность (кН)	
dyc (Cr)	69.5
stc (Cop)	88
Пу	9.65
Номинальная скорость (об / мин)	
Рейтинги скорости	6300
Ограничение скорости	8000
Вес (кг)	0.37
ISO335	
Размеры (ABMA)	3CC
Размеры (мм)	
d	50
d1 □	65.6
B	20
C	15.5
r1,2 (мин)	3
r3,4 (мин)	1
a	18
Размеры абатмента и галтели (мм)	
да (макс)	57
дБ (мин)	62
Да (мин)	72
Да (макс.)	74
Дб (мин)	77
Са (мин)	4
Сb (мин)	4.5
ра (макс)	2.5
rb (макс.)	1
Ценить	
e	0.43
Y	1.4
Эй	0.8

GQZ high quality 32000 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered

roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com